


OPERATION



- Heat Shrinkable Sleeve
- Cardboard liner
- Channels with under clip
- Branch off kit
- Shield Continuity wire
- Abrasive strip
- Cleaning tissue
- Transparence film
- Petro- Jelly
- Aluminum foil
- PVC strip
- Desiccant
- Mastic type
- Installation procedure

Sizing / ordering information


(Dimensions in mm)




| Description | Max splice bundle Diameter (A) | Min cable Diameter (B) |
|---------------|--------------------------------|------------------------|
| RSB 250 32/8 | 32 | 8 |
| RSB 250 37/12 | 37 | 12 |
| RSB 250 50/18 | 50 | 18 |
| RSB 250 70/23 | 70 | 23 |


BOKT KIT CONTENT

- Branch off clip
- Cleaning tissue
- Tie wrap
- shield continuity clip + connector
- aluminum foil

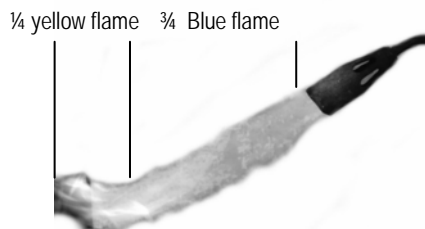


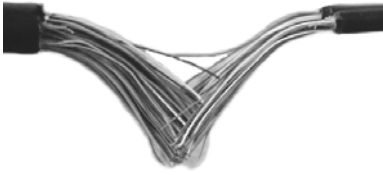

Prepared cables, cut and remove cable sheath

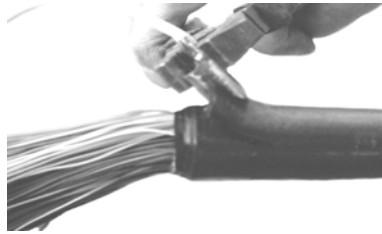

Attach shield continuity wire to cable sheath with clip

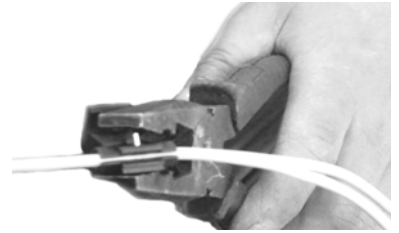

Connect branch wire with main continuity wire by clip



Wraps around the cable edge with Mastic strip




Wrap around joint with transparence film, tight wrap the edge on mastic with PVC type.



Fill Petro-jelly from top



Pucker the film package from top to the end.




Center the carboard liner over splice



Flame brush cable



Wrapping aluminum foil strip over mark 10mm

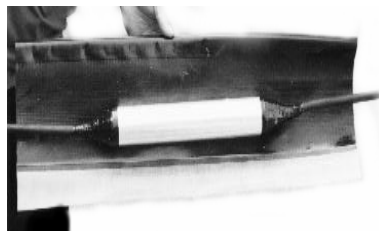


Place a mark on the cable just outside the edge of the sleeve



Installing shrinkable sleeve, slide on channel




Install branch clip slipping clip over sleeve as far as possible



Continue heating evenly around sleeve from center to end until entire sleeve is recovered



Tap channel down to conform to cable



Strain cables with tie wrap



Operation Completely